


# Walk Through Metal Detector

## ZK-D1065 18 Zones Standard



Count statistics of alarms and people

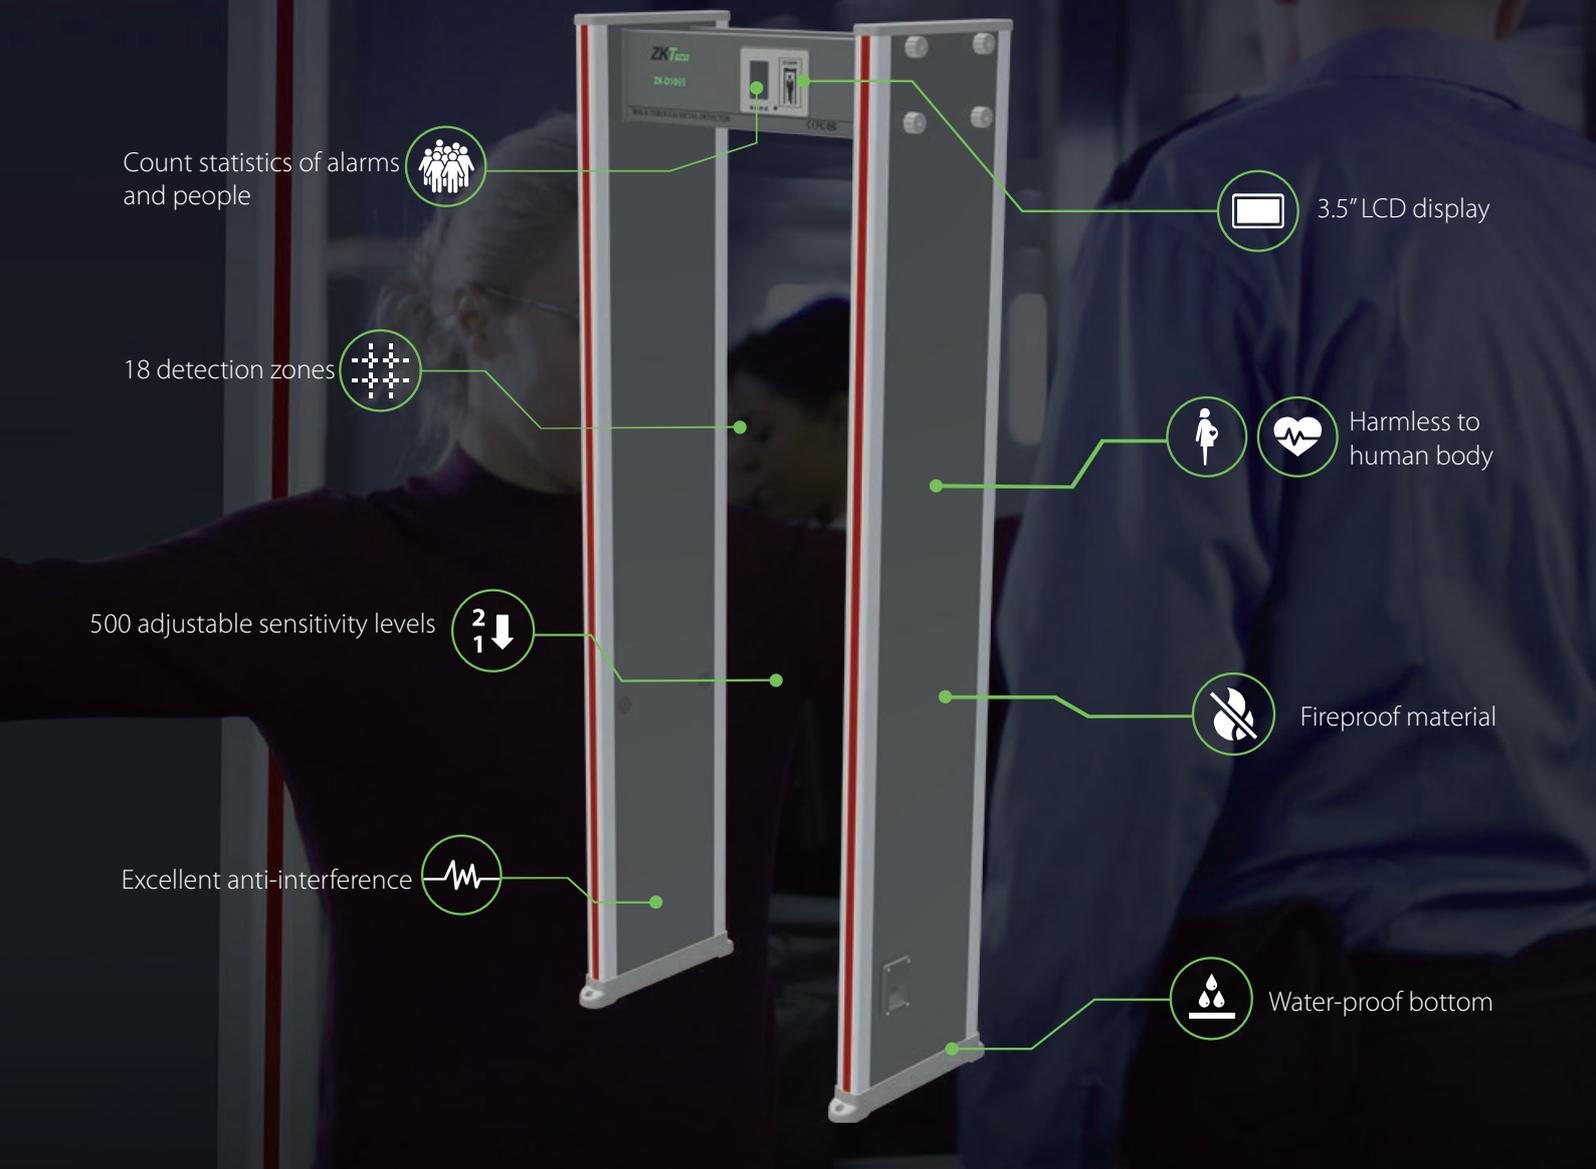

18 detection zones



500 adjustable sensitivity levels



Excellent anti-interference



3.5" LCD display



Harmless to human body



Fireproof material



Water-proof bottom

## Applications



Exhibition center



Government office



Electronic factory



Prison



Finance



Hotel


- Up to 18 detection zones and 500 sensitivity levels allow precise contraband detection.
- Accurate detection of a wide range of contrabands.
- Clear threat indication with synchronous sound alert and LED indicator.
- Separate counting of in and out number of person.
- Automatic setting of sensitivity and channel.
- Simple installation and use.

## Specification

Display	3.5" TFT Color Screen
Physical Keypad	4 keys
Detection Zone	6/12/18 zones mode adjustable
Sensitivity Level	500
Channel	100
Smallest Metal Objects Detected	Coin-sized Metals
Maximum Detection Distance	Vertical 20-2000mm
Detection Sound Alert	6 types of alarm tones (adjustable) 0-6 levels of volume adjustable (Maximum volume 80 dB)
Detection Visual Indicator	2 sets of LEDs (red) are evenly distributed on the left and right door panels LED (Steady red= metal contraband detected)
Throughput	>40 persons per minute
Self-diagnosis Program	Yes
Detection Mode	Automatic Detection Mode/ Infrared Detection Mode (default)
Number of IR Groups	2
Detected Contraband	Ferrous and non-ferrous metal weapons
Enclosure Material	Flame Retardant ABS Polymer, Medium Density Fiberboard, PVC
Power supply	AC100V to 240V (DC12V/3A)
Input Voltage	DC12V
Operating Current	1.4A
Operating Power	16W
Operating Time (Estimated)	24/7 operation capability (continuous operation)
Operating Frequency	5.7KHz ~ 9.6KHz
Operating temperature	-20°C ~ 55°C
Storage Temperature	-25°C ~ 60°C
Operating Humidity	<95% RH (non-condensing)
Ingress Protection Rating	N/A (waterproof and dustproof) N/A (vandal resistant)
Application Environment	Indoor
Dimensions (L*W*H)	2213 * 831 * 471 (mm)
Lane Size (L*W*H)	2000*710*399 (mm)

<b>Dimensions with Packaging (L*W*H)</b>	2266 * 540 * 270 (mm)
<b>Weight</b>	Gross Weight: 42kg
	Net Weight: 35kg
<b>Interface</b>	Relay Output: NO
	Network Interface: NO
<b>Certifications</b>	CE, FCC, ISO9001
<b>Remote Control</b>	NO

## Dimensions (mm)

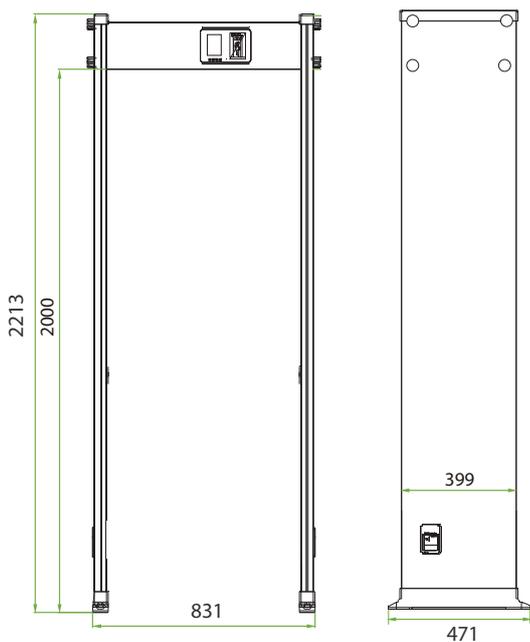

## Recommended uses

High visitors flowrate



Electronic Factory



Food manufacturers



Cigar Factory

